

The KIND TMK I is a 2U rack mounting kit for distribution line transformers, user configurable, that can house up to six 50-90W or up to three 200/300/400W line transformers. Mixed configuration of three 50-90W plus three 200/300/400W line transformers are obtainable.


The XF- line transformers are user mounted inside of TMK I and the available standard version has a 100V output, 70V version is available on demand.

Thanks to the special winding and the natural behaviour of the toroidal core, the KIND line transformers have a wide frequency response which makes them ideal for high quality musical systems.

The KIND TMK I with XF- line transformers has been specially designed for KIND amplifiers, but with the right power matching, they can be used also with other amplifiers available on the market, which should have the same KIND models specifications.

An ideal application of TMK I with XF000003-00 line transformer is to be used together with KIND MCX84 / MCX86 multichannel amplifiers, in this way the result is 4 or 6 channels with 50W power and 100V output distribution line.

TMK I makes very flexible the usage of amplifiers for installation. It allows to use the right transformer, according to the power needed, to drive one or more distribution line let you use the amplifier's channels in independent ways driving, for instance, a 100V line with one channel and impedance loudspeakers system with another one. The TMK I rack mounting kit, and the XF- line transformers are shipped separately. Together with the TMK I are supplied all screws to permit every transformers mounting configuration.

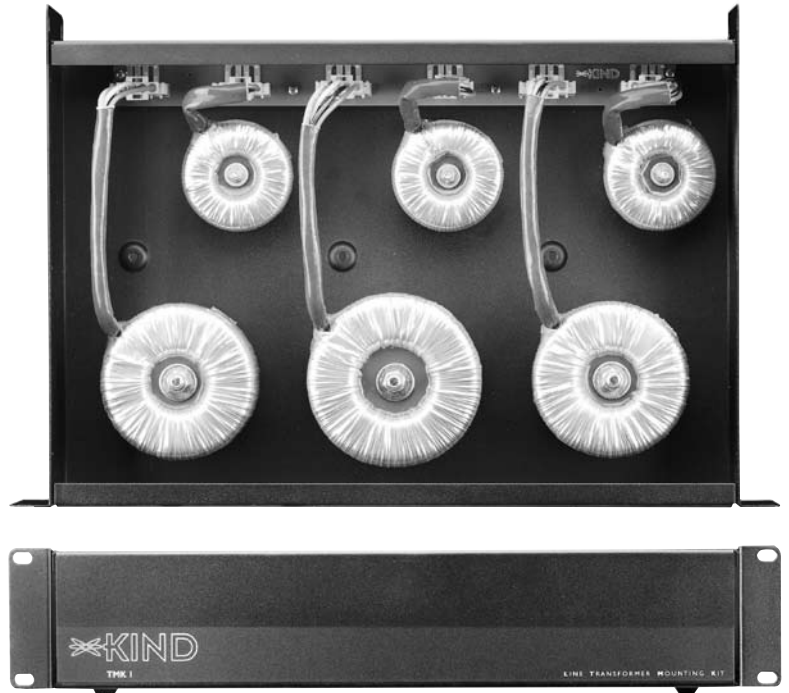

TMK I Benefits

- Compact Design: 2 RU spaces for six line transformers
- Improved audio performance
- Easily configurable
- Upgradable
- Suitable for high power line distribution
- System match several power step
- Transform any audio amplifier suitable for audio line distribution


Specifications

TMK I Transformer Mounting Kit

Code	XF000003	XF000014	XF000004	XF000005	XF000006
Power Rating	50 W	90 W	200 W	300 W	400 W
Input Voltage	20V	27V	40V	48.99V	56.57V
Output Voltage	100V (70V on require)	100V (70V on require)	100V (70V on require)	100V (70V on require)	100V (70V on require)
Performance					
THD+N 100 Hz - 20kHz	<0.05%	<0.05%	<0.05%	<0.05%	<0.05%
THD+N 50 Hz - 20kHz	<0.2%	<0.2%	<0.2%	<0.2%	<0.2%
Frequency Response +0/-3dB	50Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz	50Hz - 20kHz
Tranformer Weight - Net	0.7 kg	1.1 kg	1.75 kg	2.5 kg	4 kg
Inputs / Outputs Connectors	4-pin detachable Europlug (Phoenix)				
TMK I chassis only					
Dimensions (W/H/D)	W: 483 mm (19"), H: 88.9 mm (3.5" - 2 RU), From front mounting rails D: 315 mm (12.4")				
Weight - Net / Shipping	4 kg (8.8 lbs.) / 6.5 kg (14.3 lbs)				

Code	Power	Amplifier Model For Right Matching
XF000003	50 W	MCX 84 / MCX 86
XF000014	90 W	MCX 124 / MCX 126
XF000004	200W	KDL 800 / KDX 9.2 / KQX 16.4
XF000005	300 W	KDL 1200 / KDX 14.2/ DDX 1522 / KQX 22.4 / DQX 3024
XF000006	400 W	KDL 1600 / KDX 18.2 / DDX 2022 / KQX 28.4 / DQX 4024

All specifications are subject to change without notice.

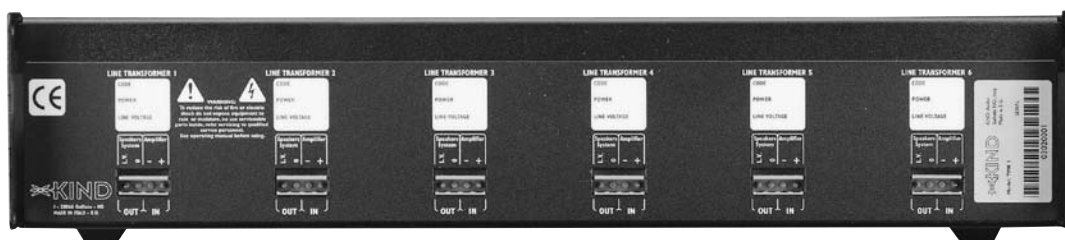

In / Out connectors rear panel



KIND is a trademark of A&AG S.r.l.
Via Montello, 19 - 28066 Galliate (NO) ITALY - Tel. +39 0321 865271 - Fax +39 0321 861674 - e-mail: info@kindaudio.com

Item no. TDS-MCX-V01-06/03/08

